
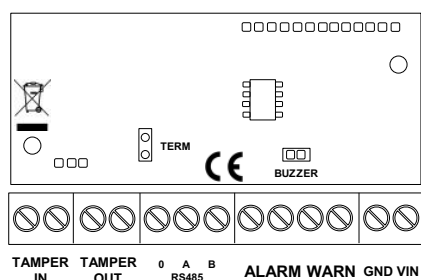
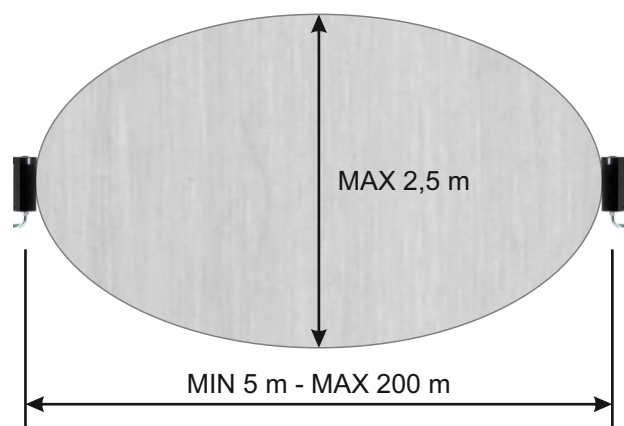


Microwave barrier with 200m range

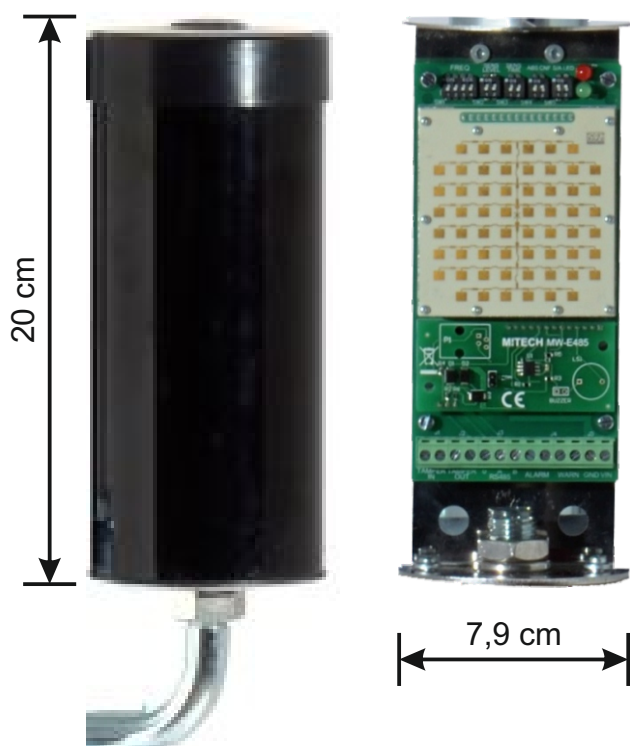

- Range: from 5m to 200m
- Small size
- Pole or wall installation
- RS485 interface
- Adjustable sensitivity
- IP65 protection
- Operation: from -25 ° C to + 55 ° C
- TX + RX consumption only 180mA at 12VDC
- Horizontal lobe opening <1.5 °
- Frequency: 24GHz (over 200 channels)
- Conformity: EN 50131-1 / CEI 79-3
- ROhs: 2001/65 / EU
- 3 year warranty

OVERVIEW

TALOS SMART is a miniaturized and high efficiency microwave barrier with a range of 200 meters. It consists of a TX + RX pair with IP65 protection degree, configurable either through DIP SWITCH or with the included software. It can be installed on a pole or on the wall.

ACCESSORIES INCLUDED



Bracket for pole fixing, box for pole or wall fixing, cable gland, configuration software.

OPTIONAL ACCESSORIES



TS-POW

Power supply for
TALOS SMART
(one per device)

TS-PL

Pole with base on
the ground, H = 110
cm, diameter 48 mm