


# Fixtures protection barriers

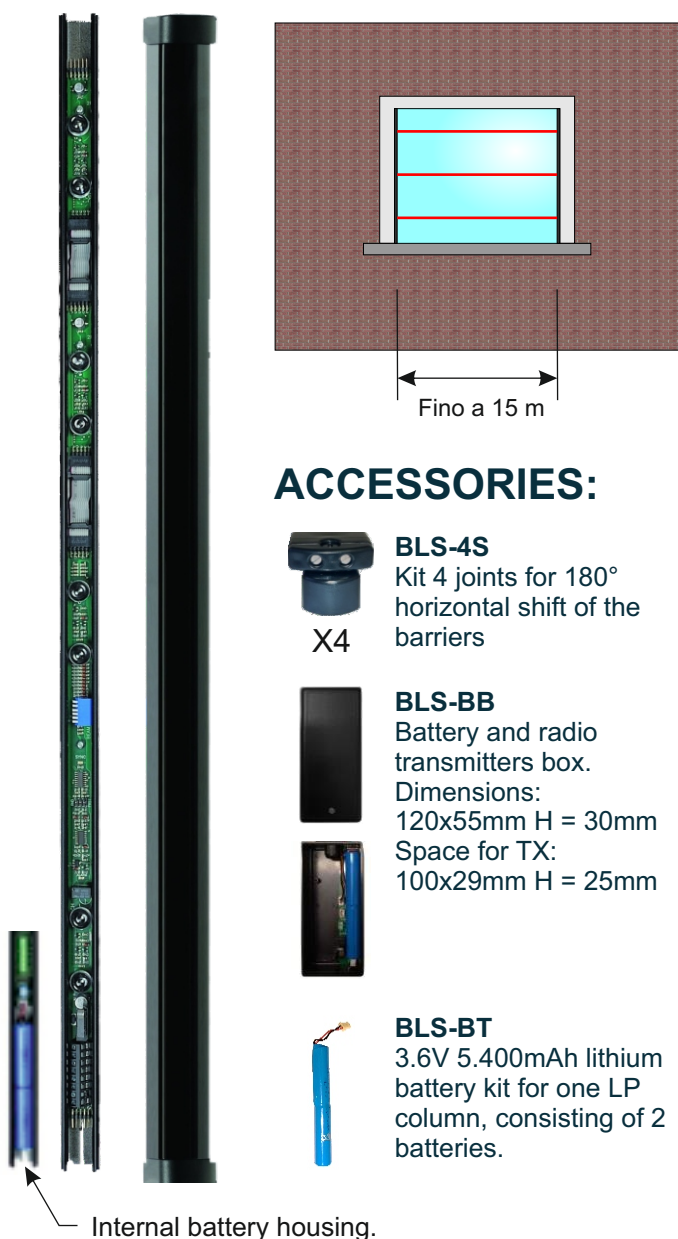

- Range 3,5m - 5m - 15m
- 12VDC power supply or with lithium battery
- Wired or optical synchronism
- Up to 10 double lenses (20 rays)
- High immunity to sunlight and insects
- Overall dimensions with 30x30mm caps.
- Heights from 0.5 to 3 meters in steps of 50 cm
- IP54 protection
- Operation: from -25 °C to + 70 °C
- Conformity: EN 50131-1/CEI 79-3
- ROhs: 2001/65/EU
- 3 year warranty

## OVERVIEW

BLADE SLIM is a family of barriers for the external protection of fixtures. Each protection consists of a TX+RX pair powered at 12VDC nominal 110mA or with lithium battery supplied. The battery is housed internally, the BLS-BB box can also be used to house it externally together with the alarm system transmitter.

The height of the column can be reduced by sawing the profile and compacting the internal electronics, specially designed for the purpose. Depending on the height and the number of lenses, the height can be reduced by 20 ... 25%.

The BLS-4S joint kit is available to install the barriers in a position not perpendicular to the supporting wall. The autonomy of the battery version is 24 months.

## AVAILABLE MODELS:

Item	Color	Range	Sync	Supply
BLSLRxx-xxBL	Black	15 m	Wired	12 VDC
BLSLRxx-xxWT	White	3,5 m	Wired	12 VDC
BLSTDxx-xx	Black	5 m	Optical	12 VDC
BLSLPxx-xx	Black	5 m	Optical	Battery

For details on the height and number of optical rays, see the price list.

